

Лазеры Z-Fiber

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: zrj@nt-rt.ru || сайт: <https://z-laser.nt-rt.ru/>

Z-Fiber

High-end fiber laser with active cooling

The ZFSM series has been developed for the most demanding applications in the market. Wherever an exceptional beam quality for high-resolution measurements or medical use is needed, the ZFSM series is the right choice. The user can choose from blue, green and red wavelengths depending on the application requirements.

The projection quality is superior to any available free-space solution in the market. The laser along with its intelligent monitoring functions enables a high stability in performance. The integrated active cooling system supports an extended lifetime and stable operation. The laser can be integrated efficiently in a sophisticated machine vision, medical, or life science setup to its communication interfaces (RS-232 & I²C).




IP 67




Output Power
up to 35 mW

Highlights


- Single-mode fiber with FC/PC connector
- Unique line uniformity and μ -optics for thin lines ($<15 \mu\text{m}$ [$1/e^2$])
- Red, green and blue wavelengths
- Optical output power up to 35 mW
- $< 15 \mu\text{m}$ bei FWHM
- $M2 < 1.05$
- Analog and simultaneous TTL modulation up to 200 kHz
- Fail-safe for critical applications (e. g. medical)
- OEM-version without housing and TEC (PCB-version)



Machine Vision



Triangulation



Analytics

Order Code

Z??	FSM	?	?	?	?
Power	Product family Size of head	Electronics	F-Focusable	Wavelength	Optics

System specification

Wavelength	nm
Wavelength tolerance	nm (typical)
Wavelength drift	nm (temperature stabilized, over total operating temperature)
Output power	mW
Spatial mode	(typical)
RMS noise (20 Hz bis 20 MHz, typical)	%
Peak-to-Peak Noise (20 Hz bis 20 MHz, typical)	%
Boresight error (1)	mrad (typical)
Pointing stability	μrad / (°C / K)
Power stability (1h)	%
Start-up time	s
Laser operation mode	

450	520	640	660
±10	-5 +10	±5	±5
< 1			
≤ 15	≤ 15	≤ 35	≤ 35
Single transversal mode			
< 0.5			
< 1			
<3			
< 10			
< 1			
< 5			
Power stabilized (integrated TEC)			

Electrical specification

Operating voltage	VDC
Operating current	A
Protection	
Electrical isolation	
Connection	
Power consumption	W
Communication interfaces	

5 - 30
Max. 3
Over temperature protection and LED pre-failure indicator, reverse polarity and transient protection (ESD, burst & surge)
Potential-free housing
M12 plug 4-pin, Sub-D plug 9-pin
< 15
I ² C, RS-232

Optical specification


Fan angles (2) μ-optics	° Degrees
Fan angles (2) standard	° Degrees
Line straightness (3)	% (of line length)
Line uniformity (4)	% (typical)
M ²	
Dot	
Focus range	mm
Classification	

10, 20 (homogeneous lines)
10, 20, 30, 45, 60, 75 (homogeneous lines)
< 0.05
±10
SM < 1.05
Circular
40 - 150 (μlp) and 150 - 10,000 (lp)
IEC 60825-1:2014 IEC 60601-2-22 (for laser classes 3R and 3B)


Keynotes

⁽¹⁾ Boresight error	Also known as pitch and skew.
⁽²⁾ Line length / fan angle	at >13.5 % I _{max}
⁽³⁾ Line straightness	Deviation from best fit line over the middle 80% of the line, for homogeneous lines
⁽⁴⁾ Line uniformity	Maximum relative optical power variation over the middle 80% of the line, for homogeneous lines

Line width vs. working distance*

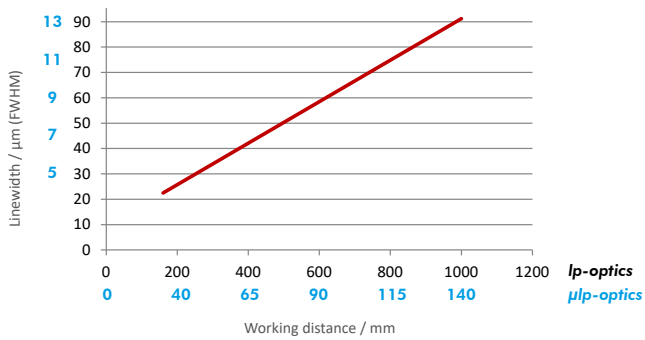

DOF vs. working distance*

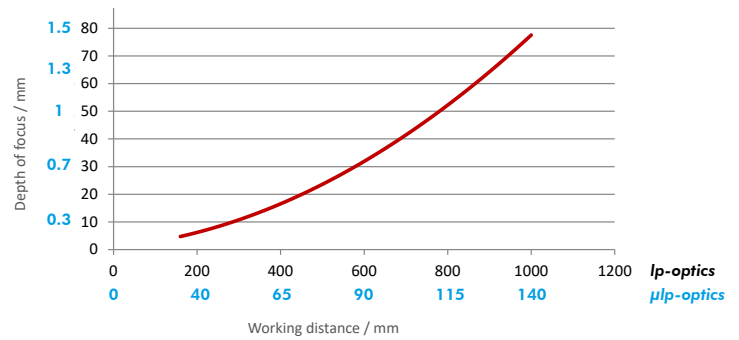

Wavelength		Calculation factor for line width		Calculation factor for depth of focus	
		μlp	lp	μlp	lp
Blue	450 nm	1.00	1.00	1.00	1.00
Green	520 nm	1.10	1.10	1.10	0.80
Red	640 nm	1.20	1.20	1.20	1.00

- μlp = μ -line Powell; very thin lines with smaller depth of focus (only available for fan angles 10° and 20° at working distances < 150 mm)

- lp = line Powell; standard setup for working distances > 150 mm

The graphs above show the values for line width and depth of focus of a 450 nm laser. To get the values for a different wavelength the factor from the table above has to be multiplied by the values from the graphs.

Example: 450 nm laser focused at 90 mm working distance:

line width approx. 9 μm (@ μlp optic); Depth of focus approx. 0.7 mm (values from the graphs)

Calculated: 640 nm laser focused at 90 mm working distance:

line width approx. 9 μm x 1.20 = 11 μm ; Depth of focus approx. 0.7 mm x 1.20 = 0.85 mm

* Values in the graphs for homogenous line profiles

** Fan angle

Software

GUI
Serial communication
I²C and RS-232

Features (e. g.):

Status query
Output power control
System configuration
Digital Modulation
Intensity control
End of life indication

Classification

Software according to IEC 62304

Digital modulation

Maximum frequency	kHz	Up to 20
Rise time (Mod High $\Rightarrow$ 90%)	ns	< 650
Fall time (Mod Low $\Rightarrow$ 10%)	ns	< 350
Signaling levels	V	VIL_max < +1.2 VIH_min > +2.8
Operation range	VDC	0 - 30

Analog modulation

Maximum bandwidth	kHz	< 100
Linearity	%	< 5 (from 10 % to 100 % of laser power)
Active range	VDC	0 - 2
Impedance		100 k Ω to internal VCC (3.3 V)
Operation range	VDC	0 - 30

Environmental conditions

Operating temperature	°C °F
Storage temperature	°C °F
Humidity	%
Dissipated heat	W

-10 up to +50 | -14 up to 122 (housed version)

0 up to +50 | 32 up to 122 (PCB-version)


-20 up to +80 | -4 up to +173

< 90, non-condensing

< 15


Mechanical Specifications

Weight			
Head	g		lbs
Electronics (housed version)	g		lbs
Dimensions	mm		inch
Diameter head $\varnothing$	mm		inch
Material			
Protection class			
Mounting			
		60	0.13
		410	0.9
Housing		105.25 x 82.5 x 36.6	4.14 x 3.25 x 1.44
PCB		70 x 60	2.76 x 2.36 (PCB-version)
Fiber length		450	17.72 (plus FC / PC connector)
		20 mm	0,79 in
		Aluminum (black anodized)	
		IP 50	
		20 mm mount	

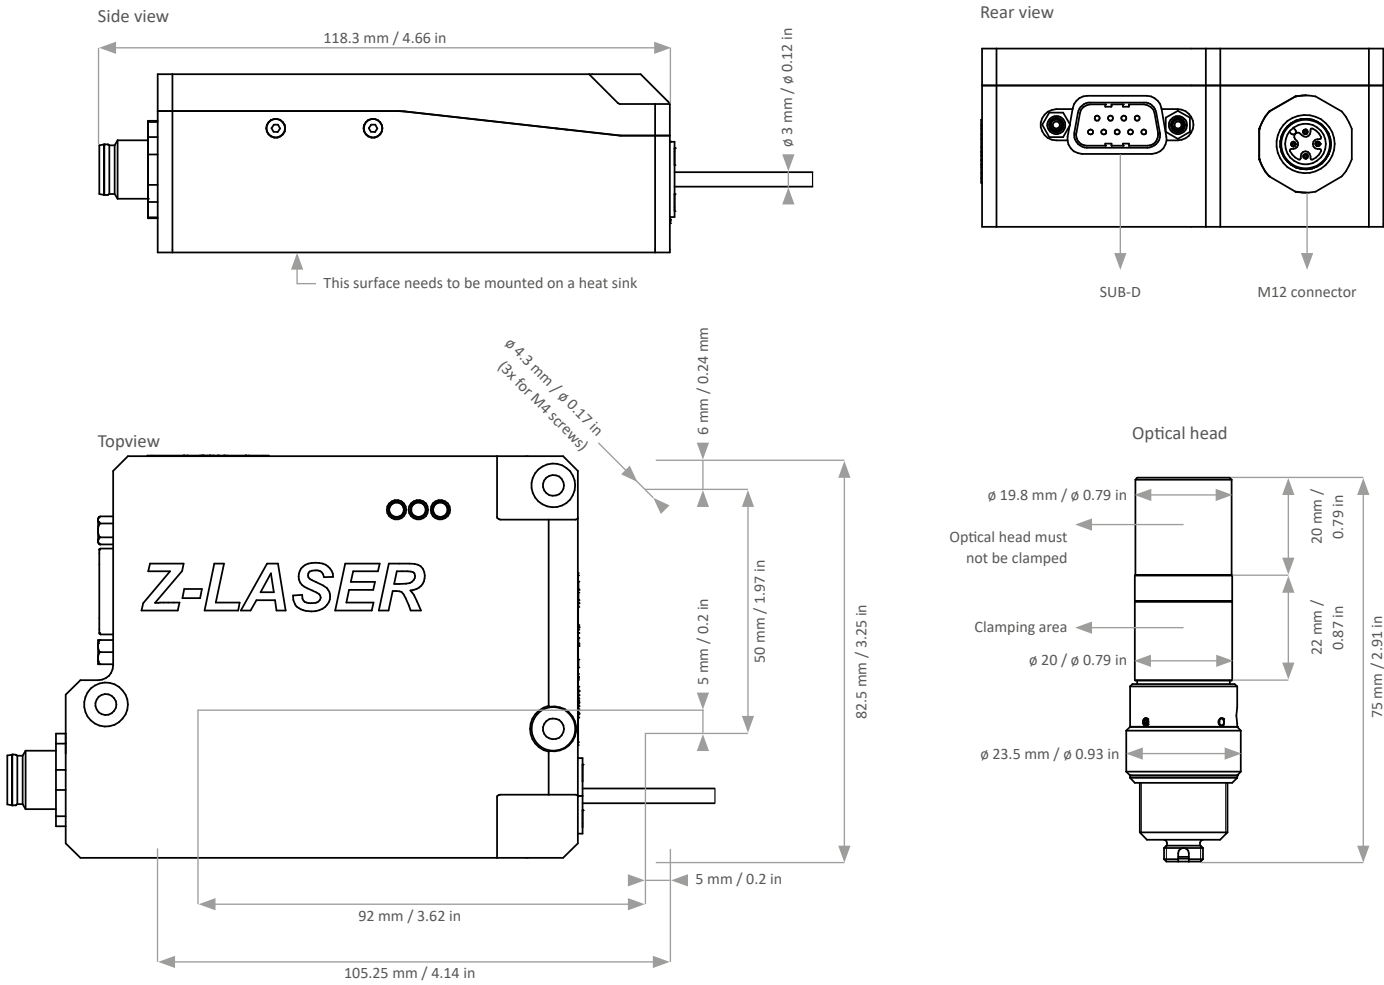

M12 4-Pin: A-Coding Male Connector

1	5 - 30 VDC, 20 VA
2	Digital-Modulation TTL
3	GND
4	Analog-Modulation (0-2 VDC)



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: zrj@nt-rt.ru || сайт: <https://z-laser.nt-rt.ru/>