

Лазеры ZQ1-MagicLine

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: zrj@nt-rt.ru || сайт: <https://z-laser.nt-rt.ru/>

ZQ1-MagicLine

More performance and visibility with certified eye safety

The Z-LASER ZQ1-MagicLine sets new standards in line laser technology. With an optical output power of 600 mW in compliance with laser class 2M safety standards, the ZQ1-MagicLine combines unrivalled performance with reliable safety. This combination makes it the world's brightest eye-safe laser in its class.

Specially developed for industrial applications where visibility and safety are paramount, the ZQ1-MagicLine is characterized by its wavelength of 520 nm (green laser light), which is particularly well perceived by the human eye. The aperture angle of 70° enables long and clearly visible laser lines, while the adjustable line width offers additional customization options through manual focusing. Integrated TTL modulation provides optimal adjustment for different applications.



Wavelength: 520 nm



600 mW optical power



Eye-safe according to laser class 2M



70° fan angle



Adjustable line width through focusing




Integrated TTL Modulation*




12-24VDC connection and power supply: WPS-24-M12-65W

Highlights


- 600 mW optical output power
- Eye-safe according to laser class 2M
- 70° fan angle
- Connection via 5-pin plug (12-24VDC) or 110-230VAC power supply unit
- Manually focusable
- IP67 RATED
- Integrated TTL Modulation*




Logistics




Safety areas




Bridge saws



Concrete saws



Saw mills



Surface Inspection

*Variant for Machine Vision

Order Code:

Z600	Q1	F	520	MV70* ML70
Power	Product family	F-Focusable	Wavelength	Optics

System specification

Wavelength	nm	520
Wavelength tolerance	nm (typical)	±10
Wavelength drift	nm (temperature stabilized, over total operating temperature)	< 1
Output power	mW	≤600
Laser class	DIN EN 60825-1:2015-07	2M
RMS noise (20 Hz to 20 MHz)	%	< 0.5
Peak-to-Peak Noise (20 Hz to 20 MHz)	%	< 1
Pointing stability over temp.	μrad / K	< 6
Long-term power stability (24h)	%	< 1
Warm-up time	min	< 2
Laser operation mode		APC

Electrical specification

Operating voltage	VDC	12 - 24
Operating current (max. at 25 °C)	A	< 4
Protection		Over temperature protection and LED pre-failure indicator, reverse polarity and transient protection (ESD, burst & surge)
Electrical isolation of housing		high-impedance to GND (1MΩ)
Connection		5-pin M12 plug
Power consumption	W	< 40

Optical specification

Fan angles ⁽¹⁾	° Degrees	70 (Gaussian line profile)
Line straightness ⁽²⁾	% (of line length)	< 0.1
Focus range	mm / in	100 up to 10,000 / 3.94 up to 393.70

Keynotes

⁽¹⁾ Line length / fan angle	at > 13.5 % I _{max}
⁽²⁾ Line straightness	Deviation from best fit line over the middle 80% of the line

Analoge modulation

Maximum bandwidth	Hz	< 10
Linearity		<5 % (from 10 % to 100 % of laser power)
Active range	VDC	0 - 2
Impedance		240 kΩ to internal VCC (3.6 V)
Operation range	VDC	0 - 30

Environmental conditions

Base Plate temperature	°C / °F
Storage temperature	°C / °F
Humidity	%
Dissipated heat	W
Shock and vibration	

Mechanical specifications

Weight	g
Dimension	mm / in
Diameter head Ø	mm / in
Material	
Protection class	
Mounting	






Digital modulation*

Maximum frequency	kHz	up to 200
Rise time (Mod High ➡ 90 %)	ns	< 500
Fall time (Mod Low ➡ 10 %)	ns	< 350
Signaling levels		VIL_max < +1.1 V VIH_min > +2.5 V
Operation range	VDC	0 - 30

-10 to +50 / 14 to +122
-40 to +60 / -40 to +140
< 90, non-condensing
Max. 35
DIN EN 60068-2-64:2009-04, DIN EN 60068-2-27:2010-02

740
205 x 65.2 x 53.3 / 8.07 x 2.57 x 2.1
50 / 1.97
Aluminum (black anodized/blue-lacquered)
IP 67
4x M4 screws (not included)

*Variant for Machine Vision

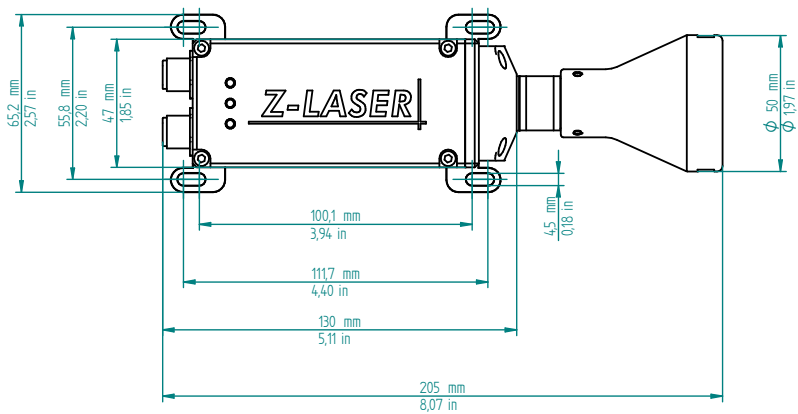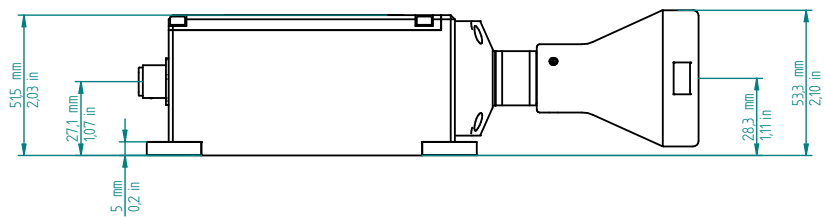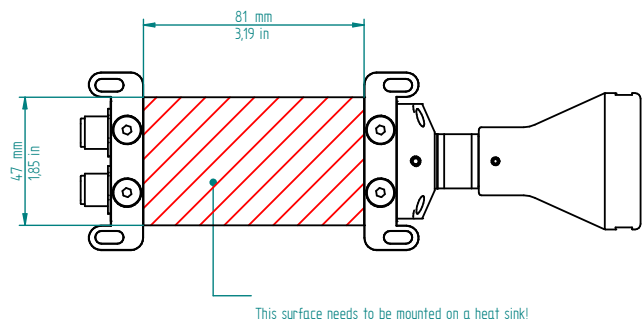

M12 8-Pin Connector A-Coding Male*

1	RX IN (RS-232)
2	TX OUT (RS-232)
3	SCL (I ² C)
4	SDA (I ² C)
5	RDY FAIL OUT
6	System Enable OUT
7	GND
8	System Enable IN

M12 5-Pin Connector A-Coding Male

1	12-24 VDC, 40 VA
2	Digital-Modulation TTL*
3	GND
4	Analog-Modulation (0-2 VDC)
5	[not active]

*Variant for Machine Vision

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: zrj@nt-rt.ru || сайт: <https://z-laser.nt-rt.ru/>